

Pressure reducing valve type DM14



description:

Pressure reducing valves made of gunmetal are used to regulate the supply pressure in a system, to compensate for different inlet pressures to a certain pressure in the outlet side.

product features:

- suitable for **liquid & gaseous not adhesive media**
- industrial design – full metal
- with piston, seal & supporting ring
- pressure adjustment via not rising spindle
- **integrated manometer connection G 1/4" inch axial**
- installation possible in any position

connection:

1/4", 3/8", 1/2", 3/4", 1", 1 1/2", 2" inch

temperature:

-40°C up to +120°C

pressure:

inlet pressure: to 60,0 bar

outlet pressure: 0,5 bar – 50,0 bar

design:

body material:

seal:

internals:

spring:

assembly position:

inlet pressure:

outlet pressure:

piston-pressure reducing valve

Gunmetal CC499K

FKM : -10°C up to +120°C

EPDM : -40°C up to +120°C

Brass CW617N

spring steel 1.1200

any position

up to 60,0 bar

Type 0 5-30 bar

Type 1 10-50 bar

Type 2 0,5-15 bar (membrane-design with secondary venting*)

Type 3 0,5-15 bar (membrane-design without secondary venting)

Attention: Type 2 only suitable for neutral gases

(e.g. compressed air)!

connection:

Manometer connection:

option:

female thread acc. DIN EN ISO 228 BSP-P

frontside axial G 1/4" inch

Wall holder for mounting

* What is secondary ventilation and what is it used for?


The secondary venting is an additional hole, usually in the spring cover of the pressure reducer.

In the case of pressure reducers with secondary venting, the outlet pressure can also be reduced with zero consumption, i.e. with the consumer closed.

When the pressure is reduced, the medium escapes through the said hole to the outside. It is therefore advisable to use pressure reducers with secondary ventilation only with neutral gases such as compressed air.

dimensions:

diameter	DN	8	10	15	20	25	40	50
connection		1/4"	3/8"	1/2"	3/4"	1"	1 1/2"	2"
inlet pressure	bar	60	60	60	60	60	60	60
outlet pressure Type 0	bar	5-30	5-30	5-30	5-30	5-30	5-30	5-30
outlet pressure Type 1	bar	10-50	10-50	10-50	10-50	10-50	10-50	10-50
outlet pressure Type 2 / 3	bar	0,5-15	0,5-15	0,5-15	0,5-15	0,5-15	0,5-15	0,5-15
body-dimensions in mm	L	68	68	60	78	102	136	136
	H	120	120	120	180	215	260	270
	h	40	40	40	40	56	63	70
	SW	26	26	26	32	44	58	70
holder (option)	L1	38	38	38	51	61	85	85
	H1/H2	18/62	18/62	18/62	18/58	22/80	15	15
	B/B1	5,5	5,5	5,5	6,5	8,5	10,5/90	10,5/90
KVS-value (DIN EN 60534-2-3)	m3/h	1,6	1,6	1,6	3,4	5,5	12,7	12,7
weight	kg	1,2	1,2	1,2	2,8	5,3	9,4	10,2

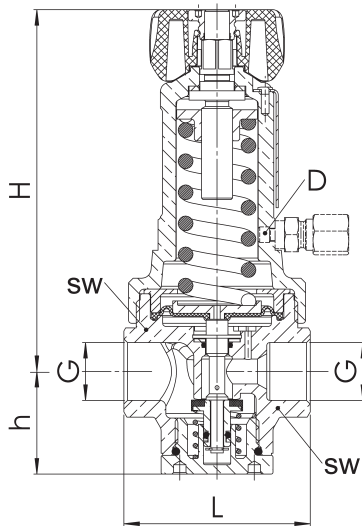

Optional with wall mount:




Image applies for DN8 to DN25

for DN8 to DN15
article number: WH01000001

for DN20
article number: WH01000004

for DN25
article number: WH01000005




Image applies for DN40 to DN50

for DN40 to DN50
article number: WH01000007

article number:

type	range of pressure	seal	diameter
DM14	00 – 5-30 bar 01 – 10-50 bar 02 – 0,5-15 bar (with secondary venting – only neutral, gaseous media)* 03 – 0,5-15 bar (without secondary venting – for liquid & gaseous media)	00 – FKM 01 – EPDM	01 – 1/4" 02 – 3/8" 03 – 1/2" 04 – 3/4" 05 – 1" 07 – 1 1/2" 08 – 2"

example – DM14010004:

DM14	01	00	04
-------------	-----------	-----------	-----------

pressure reducing valve made of gunmetal
internals are made of brass
range of pressure: 10 – 50 bar
connection: female threaded connection
seal: FKM
diameter: 3/4"

***Attention: Type 2 only suitable for neutral gases (e.g. compressed air)!**

Image similar, subject change without notice.